



**CENTRE OF TESTING SERVICE
INTERNATIONAL**

OPERATE ACCORDING TO ISO/IEC 17025

EMC TEST REPORT

TEST REPORT NUMBER : CGZ3090610-01572-E-R1



Centre of Testing Service
Building F, Dachuang Industrial Park, No.379, Zhongshan Dadao,
Guangzhou, China



EMC -- TEST REPORT

Test Report No. : CGZ3090610-01572-E-R1

03 July 2009
Date of issue

Type / Model.....	YJ-LSF5050
EUT.....	LED STRIPS
Applicant	SHENZHEN AGLARE LIGHTING CO., LTD.
Address.....	5 Floor, E Building, Longda Industry Area, Shuiwei Village, Dalang, Longhua Town, Bao'an District, Shenzhen City, Guangdong, China 518109
Telephone.....	+86-0755-27659298
Fax.....	+86-0755-27659398
Contact.....	MR CHENG
Manufacturer	SHENZHEN AGLARE LIGHTING CO., LTD.
Address.....	5 Floor, E Building, Longda Industry Area, Shuiwei Village, Dalang, Longhua Town, Bao'an District, Shenzhen City, Guangdong, China 518109
Telephone.....	+86-0755-27659298
Fax.....	+86-0755-27659398
Contact.....	MR CHENG
Test report holder	SHENZHEN AGLARE LIGHTING CO., LTD.
Address.....	5 Floor, E Building, Longda Industry Area, Shuiwei Village, Dalang, Longhua Town, Bao'an District, Shenzhen City, Guangdong, China 518109
Telephone.....	+86-0755-27659298
Fax.....	+86-0755-27659398
Contact.....	MR CHENG

Test Result according to the standards on page 3: **Positive**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1 TEST STANDARDS	5
2 SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3 EQUIPMENT UNDER TEST	6
3.1 POWER SUPPLY SYSTEM UTILISED	6
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	6
3.3 EUT OPERATION MODE	6
3.4 EUT CONFIGURATION	7
3.5 PERFORMANCE LEVEL	7
3.6 DEFINITION RELATED TO THE PERFORMANCE LEVEL	7
4 TEST ENVIRONMENT	8
4.1 ADDRESS OF THE TEST LABORATORY	8
4.2 TEST FACILITY	8
4.3 ENVIRONMENTAL CONDITIONS	8
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	8
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 MEASUREMENT UNCERTAINTY	9
4.7 TEST DESCRIPTION	9
5 TEST CONDITIONS AND RESULTS	10
5.1 CONDUCTED DISTURBANCE	10
5.2 RADIATED DISTURBANCE (MAGNETIC FIELD)	14
5.3 HARMONIC CURRENT	19
5.4 VOLTAGE FLUCTUATIONS AND FLICKER	23
5.5 ELECTROSTATIC DISCHARGE	26
5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD	28
5.7 ELECTRICAL FAST TRANSIENTS / BURST	30
5.8 SURGE	32
5.9 CONDUCTED DISTURBANCES INDUCED BY RADIO-FREQUENCY FIELDS	34
5.10 POWER FREQUENCY MAGNETIC FIELD	36
5.11 VOLTAGE DIPS	38
5.12 VOLTAGE SHORT INTERRUPTIONS	40
6 USED TEST EQUIPMENT	42
7 TEST PHOTOGRAPHS	45

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



7.1. PHOTOS OF POWER LINE CONDUCTED EMISSION MEASUREMENT45

7.2. PHOTOS OF RADIATED ELECTROMAGNETIC EMISSION MEASUREMENT45

7.3. PHOTO OF HARMONIC CURRENT EMISSION MEASUREMENT46

7.4. PHOTO OF VOLTAGE FLUCTUATIONS AND FLICKER EMISSION MEASUREMENT46

7.5. PHOTO OF ELECTROSTATIC DISCHARGE IMMUNITY MEASUREMENT46

7.6. PHOTO OF RF FIELD STRENGTH IMMUNITY MEASUREMENT.....47

7.7. PHOTO OF ELECTRICAL FAST TRANSIENT/BURST IMMUNITY MEASUREMENT.....47

7.8. PHOTO OF SURGE IMMUNITY MEASUREMENT.....48

7.9. PHOTO OF CONDUCTED DISTURBANCE IMMUNITY MEASUREMENT48

7.10 PHOTO OF POWER FREQUENCY MAGNETIC FIELD IMMUNITY MEASUREMENT48

7.11. PHOTO OF VOLTAGE DIPS IMMUNITY MEASUREMENT49

7.12. PHOTO OF VOLTAGE SHORT INTERRUPTIONS IMMUNITY MEASUREMENT49

8 EXTERNAL AND INTERNAL PHOTOS OF THE EUT50

9 Manufacturer/ Approval holder Declaration51

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

1 TEST STANDARDS

The tests were performed according to following standards:

EN 55015:2006 Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment.

EN 61547:1995+A1:2000 Equipment for general lighting purposes-EMC immunity requirements.

EN 61000-3-2: 2006 Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase).

EN 61000-3-3: 1995+A1: 2001+A2: 2005 Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.

2 SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	11 June 2009
Testing commenced on	18 June 2009
Testing concluded on	20 June 2009

2.2 FINAL ASSESSMENT

The EMC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- **not** fulfilled.

The equipment under test

- fulfils the EMC requirements cited on page 3.
- **does not** fulfil the EMC requirements cited on page 3.



3 EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : DC 12V AC 115V/60Hz
 12 V DC 24 V DC
 Other (Specified blank below) Battery 1.5V*3, DC 6V

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1
 Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- Standby
- Test programme (H - Pattern)
- Test programme (colour bar)
- Operating mode 2500 U/min. (1 cylinder)
- Operating mode 1500 U/min. (> 1 cylinder)
- Ignition on , Motor off
- Speed 50 km/h
- Test program (customer specific)

Operation mode 1 : On

The equipment under test was operated during the measurement under the following conditions: Test program (customer specific)

Emissions tests.....: According to EN 55015, searching for the highest disturbance.

Immunity tests: According to EN 61547, searching for the highest susceptibility.

Harmonic current..... : According to EN 61000-3-2, searching for the highest disturbance.

Voltage fluctuation.....: According to EN 61000-3-3, searching for the highest disturbance.

3.4 EUT configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

Name	:	Adapter
M/N	:	LCAP07F
S/N	:	I1632786S
Manufacturer	:	LIEN CHANG
Power Cord	:	Unshield
Certificate	:	By DoC

- unscreened power cables
- customer specific cables

3.5 Performance level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product.

3.6 Definition related to the performance level

- based on the used product standard
- based on the declaration of the manufacturer, requestor or purchaser

Criterion A:

Definition: normal performance within limits specified by the manufacturer, requestor or purchaser:

Criterion B:

Definition: temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention:

Criterion C:

Definition: temporary loss of function or degradation of performance, the correction of which requires operator intervention:

Criterion D:

Definition: loss of function or degradation of performance, which is not recoverable, owing to damage to hardware or software, or loss of data:

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Building F, Dachuang Industrial Park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

Centre of Testing Service has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374 on June 24, 2009 .

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	25-75 %
Atmospheric pressure:	86-106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- - The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Radiatd Electromagnetic Disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

4.7 Test Description

4.7.1 Description of Standards and Results

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55015: 2006	-----	PASS
Radiatd Electromagnetic Disturbance	EN 55015: 2006	-----	PASS
Harmonic current emissions	EN 61000-3-2: 2006	Class C	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 1995 +A1:2001+A2:2005	-----	PASS
IMMUNITY (EN 61547:1995+A1: 2000)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	IEC 61000-4-2:1995 +A1:1998+A2:2000	B	PASS
Radio-frequency, Continuous radiated disturbance	IEC 61000-4-3: 2008	A	PASS
Electrical fast transient (EFT)	IEC 61000-4-4: 2007	B	PASS
Surge	IEC 61000-4-5: 2005	B	PASS
Radio-frequency, Continuous conducted disturbance	IEC 61000-4-6: 2008	A	PASS
Power frequency magnetic field	IEC 61000-4-8: 2001	A	PASS
Voltage dips and interruptions	IEC 61000-4-11: 2004	B&C	PASS
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5 TEST CONDITIONS AND RESULTS

5.1 Conducted disturbance

For test instruments and accessories used see section 6 part 6.3.

5.1.1 Description of the test location


Test location: Shielded room

5.1.2 Description of the test set-up

5.1.2.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.1.2.2 Block Diagram of Test Setup

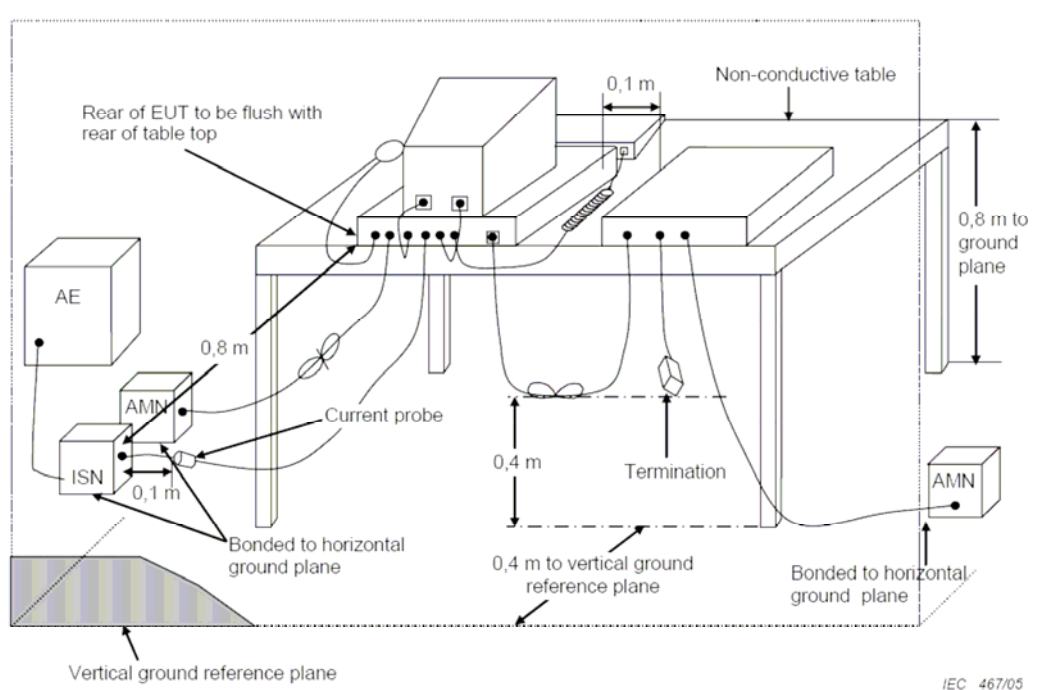

5.1.3 Limits disturbance

Frequency	At mains terminals (dB μ V)	
	Quasi-peak Level	Average Level
9kHz ~ 50kHz	110	--
50kHz ~ 150kHz	90 ~ 80*	--
150kHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 2.51MHz	56	46
2.51MHz ~ 3.0MHz	73	63
3.0MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.1.4 Test result

The requirements are	Fulfilled
Band width	9kHz
Frequency range	9kHz - 30 MHz
Min. limit margin	>19 dB at 9kHz - 30 MHz

Remarks: The limits are kept. For detailed results, please see the following page(s).

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service



5.1.5 Test protocol

Test point Operation mode 1 Remarks:	L	Result:	<input checked="" type="checkbox"/> - passed <input type="checkbox"/> - not passed
---	---	---------	---

EUT	LED STRIPS
Firm Name	SHENZHEN AGLARE LIGHTING CO., LTD.
Operating Condition	DC 12V
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Roy
Test Specification	MODE NO: YJ-LSF5050

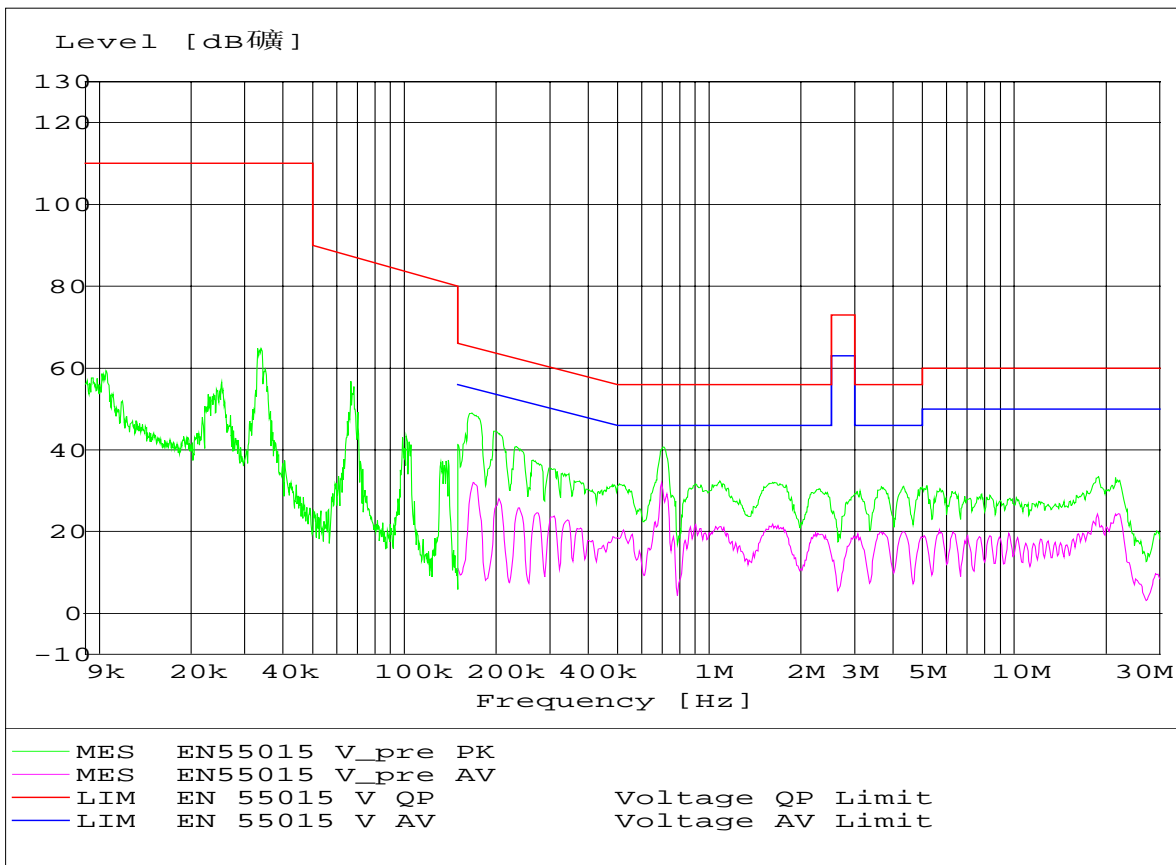

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Test point: N	Result:	■ - passed □ - not passed
Operation mode 1		
Remarks:		

EUT	LED STRIPS
Firm Name	SHENZHEN AGLARE LIGHTING CO., LTD.
Operating Condition	DC 12V
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Roy
Test Specification	MODE NO: YJ-LSF5050

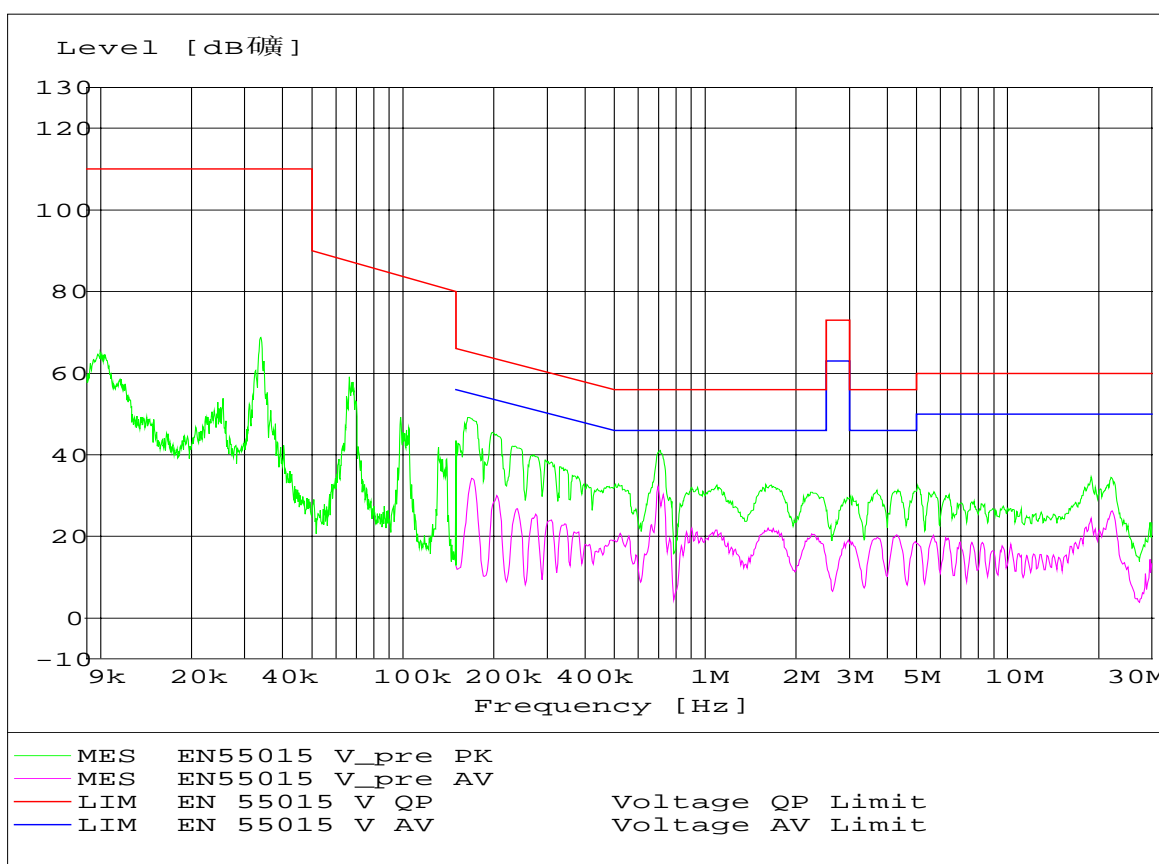

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.2 Radiated disturbance (magnetic field)

For test instruments and accessories used see section 6 part 6.1.

5.2.1 Description of the test location

Test location : Shielded room


Test disturbance: 2 Meter

5.2.2 Description of the test set-up

5.2.2.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.2.2.2 Block Diagram of Test Setup

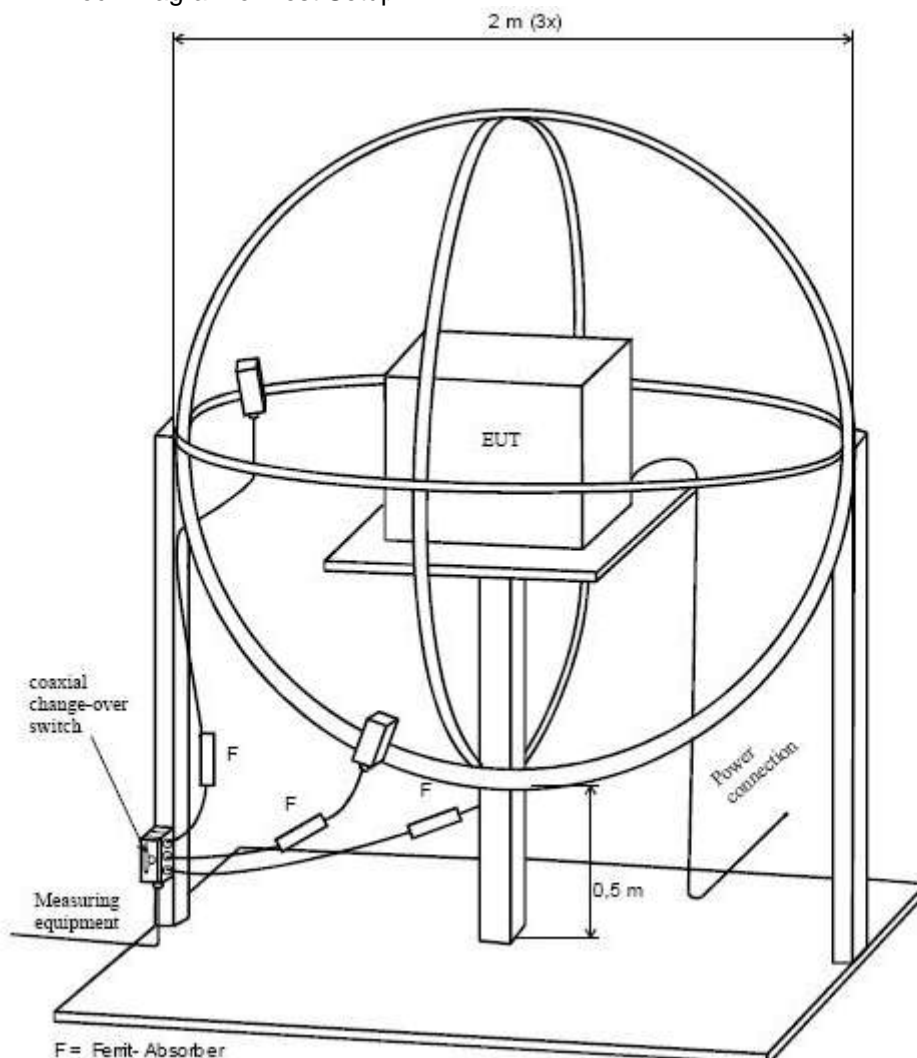

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.2.3 Limits of disturbance

Frequency	Limits for loop diameter (dB μ A)	
	2m	
9kHz ~ 70kHz	88	
70kHz ~ 150kHz	88 ~ 58*	
150kHz ~ 2.2MHz	58 ~ 26*	
2.2MHz ~ 3.0MHz	58	
3.0MHz ~ 30MHz	22	

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

5.2.4 Test result

The requirements are	Fulfilled
Band width	9kHz
Frequency range	9kHz - 30 MHz
Min. limit margin MHz	>12.4 dB at 9kHz- 30MHz


Remarks: The limits are kept. For detailed results, please see the following page(s).



5.2.5 Test protocol

Test point: X	Result:	■ - passed □ - not passed
Operation mode 1		
Remarks:		

EUT	LED STRIPS
Firm Name	SHENZHEN AGLARE LIGHTING CO., LTD.
Operating Condition	DC 12V
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Roy
Test Specification	MODE NO: YJ-LSF5050

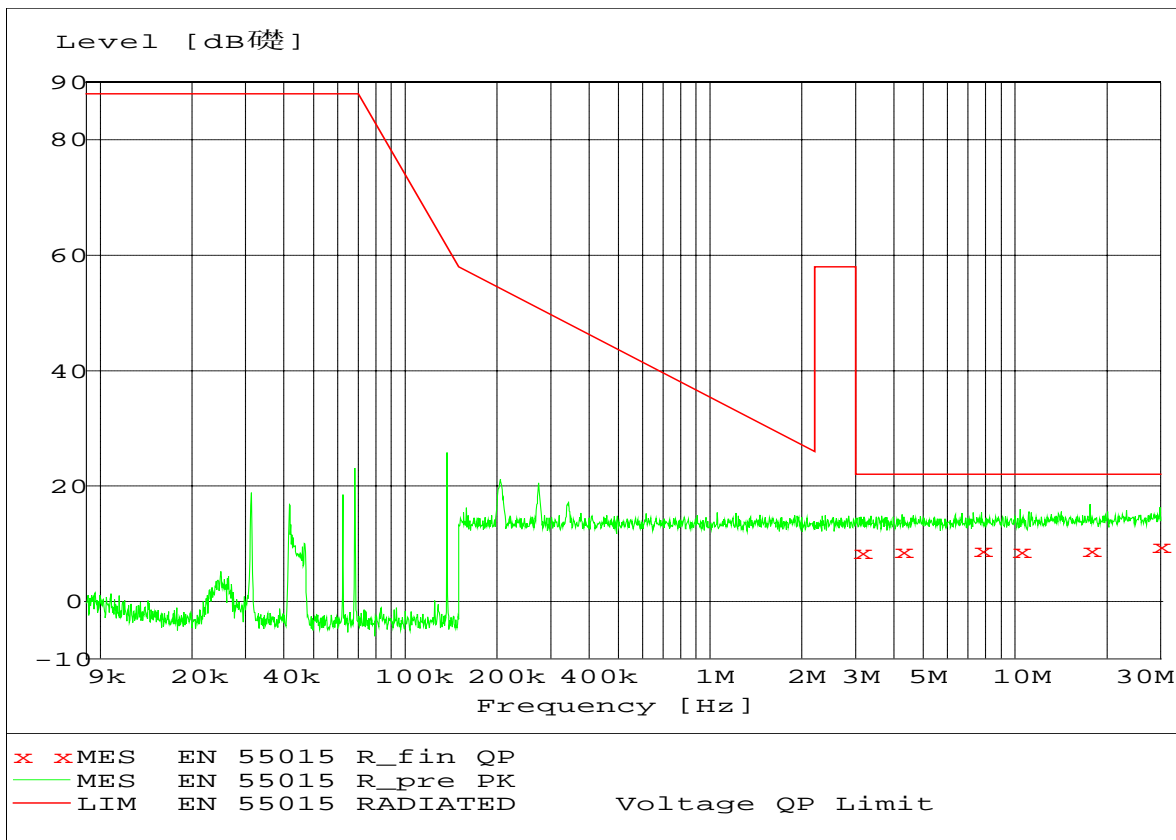

MEASUREMENT RESULT: "EN 55015 R_fin QP"

Frequency MHz	Level dBμA	Transd dB	Limit dBμA	Margin dB	Loop	Azimuth deg
3.129296	8.50	10.0	22	13.5	X	0.00
4.255422	8.70	10.0	22	13.3	X	0.00
7.744609	8.80	10.0	22	13.3	X	0.00
10.406250	8.70	10.0	22	13.3	X	0.00
17.625618	8.80	10.0	22	13.2	X	0.00
29.853444	9.60	10.0	22	12.4	X	0.00

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Test point: Y	Result:	■ - passed □ - not passed
Operation mode 1		
Remarks:		

EUT	LED STRIPS
Firm Name	SHENZHEN AGLARE LIGHTING CO., LTD.
Operating Condition	DC 12V
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Roy
Test Specification	MODE NO: YJ-LSF5050

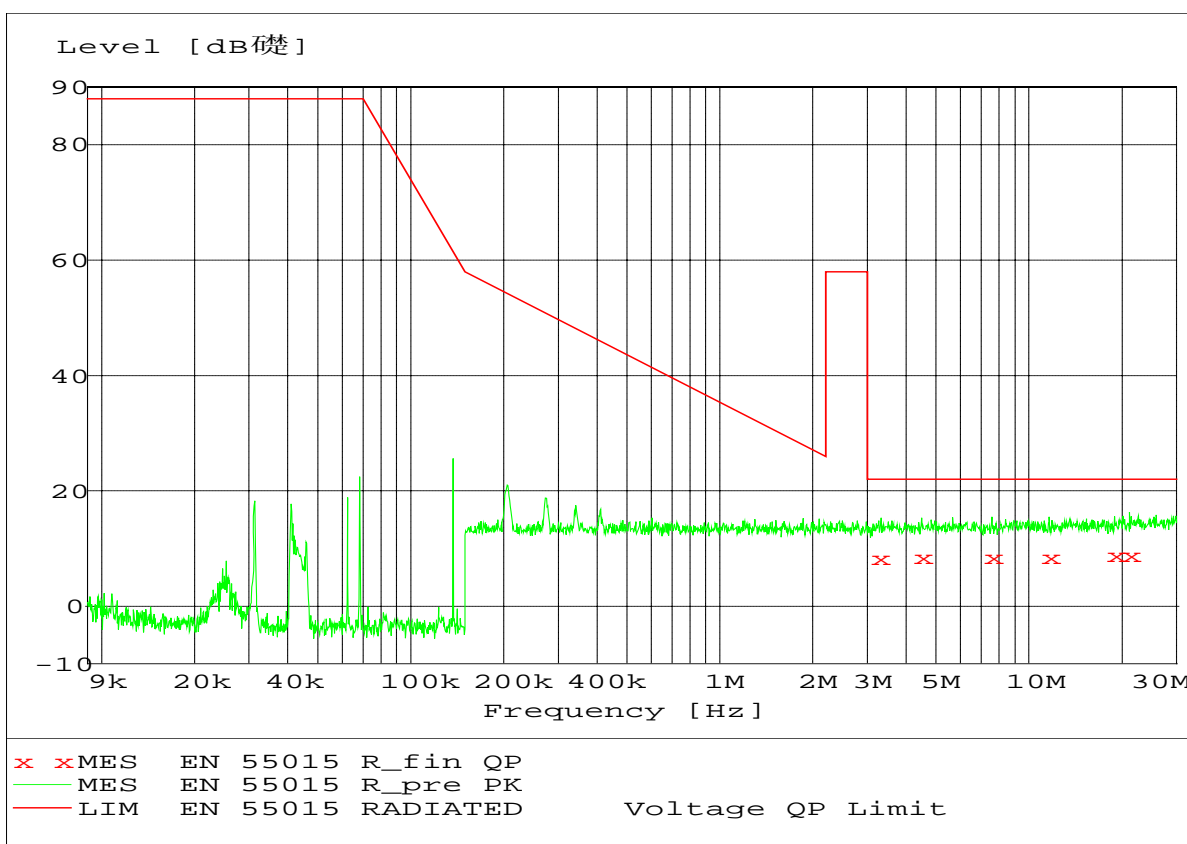

MEASUREMENT RESULT: "EN 55015 R_fin QP"

Frequency MHz	Level dBμA	Transd dB	Limit dBμA	Margin dB	Loop	Azimuth deg
3.269773	8.30	10.0	22	13.7	Y	0.00
4.500021	8.40	10.0	22	13.6	Y	0.00
7.591559	8.50	10.0	22	13.5	Y	0.00
11.636925	8.50	10.0	22	13.5	Y	0.00
18.938744	8.90	10.0	22	13.1	Y	0.00
21.178497	8.90	10.0	22	13.1	Y	0.00

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Test point: Z	Result:	■ - passed □ - not passed
Operation mode 1		
Remarks:		

EUT	LED STRIPS
Firm Name	SHENZHEN AGLARE LIGHTING CO., LTD.
Operating Condition	DC 12V
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Roy
Test Specification	MODE NO: YJ-LSF5050

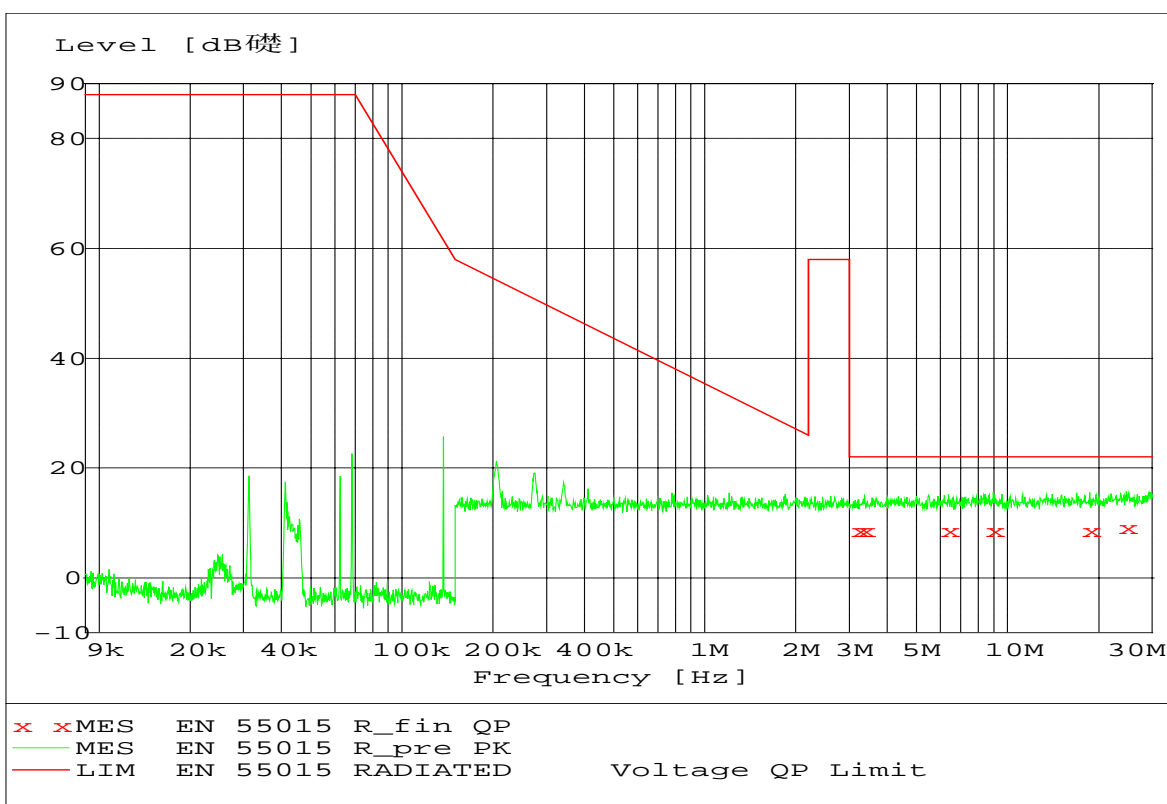

MEASUREMENT RESULT: "EN 55015 R_fin QP"

Frequency MHz	Level dBμA	Transd dB	Limit dBμA	Margin dB	Loop	Azimuth deg
3.217975	8.60	10.0	22	13.4	Z	0.00
3.375882	8.60	10.0	22	13.4	Z	0.00
6.394128	8.50	10.0	22	13.5	Z	0.00
8.977324	8.50	10.0	22	13.5	Z	0.00
18.638731	8.60	10.0	22	13.4	Z	0.00
24.647690	9.10	10.0	22	12.9	Z	0.00

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.3 Harmonic current

For test instruments and accessories used see section 6 part 6.4.

5.3.1 Description of the test location

Test location : Test location no. 1

5.3.2 Limits of harmonic current


Test configuration and procedure see clause 7.1 of standard EN 61000-3-2: 2006.

5.3.3 Description of the test set-up

5.3.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.3.3.2 Block Diagram of Test Setup

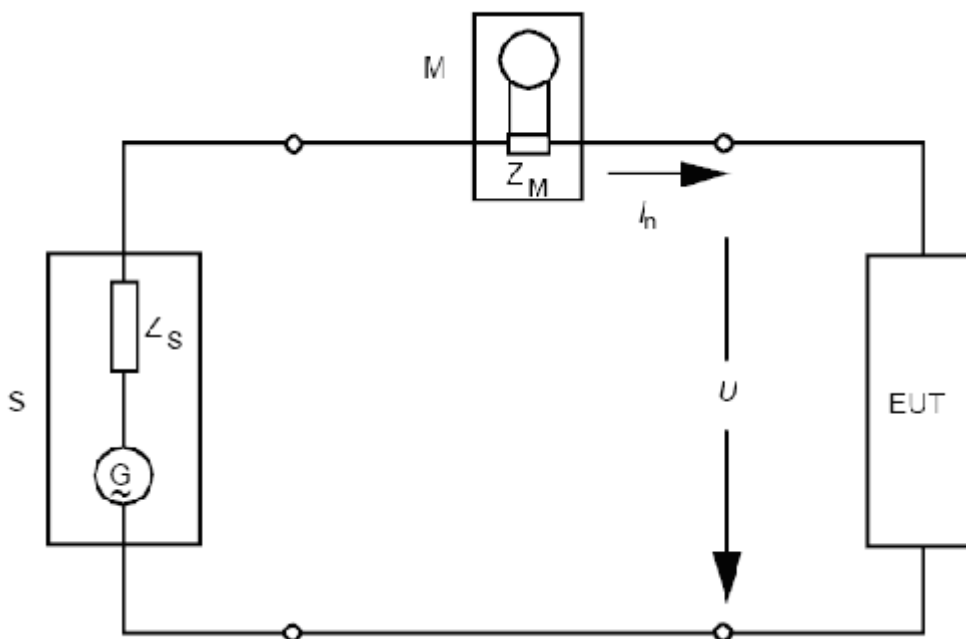

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.3.4 Test result

The requirements are **Fulfilled**

Remarks: The limits are kept. For detailed results, please see the following page(s).

5.3.5 Test protocol

Operation mode 1	Result:	<input checked="" type="checkbox"/> - passed
Remarks:		<input type="checkbox"/> - not passed

Standard used:	EN 61000-3-2: 2006 Quasi-Stationary – Equipment class C
Observation time:	1 min
Windows width:	10 periods – (EN/IEC 61000-4-7 Edition 2002)
Customer:	SHENZHEN AGLARE LIGHTING CO., LTD.
Mains supply voltage:	DC 12V
Ambient Temperature:	25°C
Humidity:	56%
Barometric Pressure:	100kPa
E. U. T.:	LED STRIPS
	M/N: YJ-LSF5050
Date of test:	19 June 2009
Tester:	Roy

Test result	
E. U. T.:	PASS
Power Source:	PASS

Check harmonics 2..40 [exception odd 21..39]:

Harmonic(s) > 150%:	
Order (n):	None
Harmonic(s) with average > 100%:	
Order (n):	None

Check odd harmonics 21..39:

All Partial Odd Harmonics below partial limits.
Harmonic(s) > 150%: Order (n): None
Harmonic(s) with average > 150%: Order (n): None

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

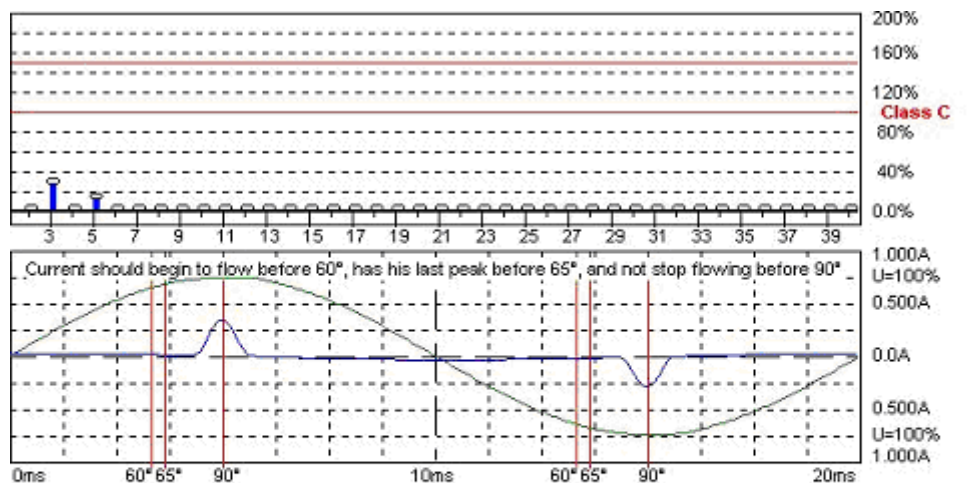

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)

Urms = 230.7 V P = 7.436 W THC = 0.022 A Range: 1 A
 Irms = 0.076 A pf = 0.426 HImax = 0.089 A V-nom: 230 V
 TestTime: 1 min (100%)

Test completed, Result: PASSED

EMC-1000 EMC-Partner

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Imax [A]	Imax%L [%]	Limit [A]	Status
1	50	0.0724		0.0728			
2	100	0.0000		0.0002			
3	150	0.0199	26.010	0.0199	26.010	0.0765	
4	200	0.0000		0.0001			
5	250	0.0064	11.811	0.0064	11.811	0.0543	
6	300	0.0000		0.0000			
7	350	0.0000		0.0049			
8	400	0.0000		0.0001			
9	450	0.0000		0.0007			
10	500	0.0000		0.0000			
11	550	0.0000		0.0009			
12	600	0.0000		0.0000			
13	650	0.0000		0.0004			
14	700	0.0000		0.0000			
15	750	0.0000		0.0005			
16	800	0.0000		0.0000			
17	850	0.0000		0.0004			
18	900	0.0000		0.0000			
19	950	0.0000		0.0002			
20	1000	0.0000		0.0000			
21	1050	0.0000		0.0002			
22	1100	0.0000		0.0000			
23	1150	0.0000		0.0001			
24	1200	0.0000		0.0000			
25	1250	0.0000		0.0002			
26	1300	0.0000		0.0000			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



27	1350	0.0000		0.0001			
28	1400	0.0000		0.0000			
29	1450	0.0000		0.0001			
30	1500	0.0000		0.0000			
31	1550	0.0000		0.0001			
32	1600	0.0000		0.0000			
33	1650	0.0000		0.0001			
34	1700	0.0000		0.0000			
35	1750	0.0000		0.0001			
36	1800	0.0000		0.0000			
37	1850	0.0000		0.0001			
38	1900	0.0000		0.0000			
39	1950	0.0000		0.0001			
40	2000	0.0000		0.0000			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.4 Voltage fluctuations and flicker

For test instruments and accessories used see section 6 part 6.5.

5.4.1 Description of the test location

Test location : Test location no. 1

5.4.2 Limits of voltage fluctuation and flicker


Test configuration and procedure see clause 5 of standard EN 61000-3-3: 1995+A1: 2001+A2: 2005.

5.4.3 Description of the test set-up

5.4.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.4.3.2 Block Diagram of Test Setup

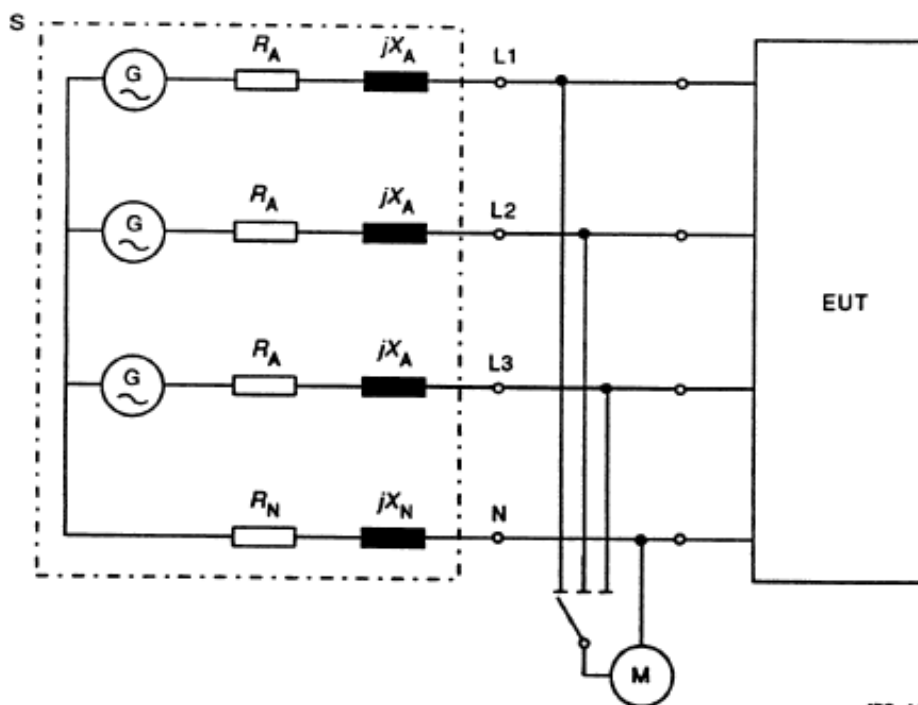

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.4.4 Test result

The requirements are **Fulfilled**

Remarks: The limits are kept. For detailed results, please see the following page(s).

5.4.5 Test protocol

Operation mode 1 Remarks:	Result:	<input checked="" type="checkbox"/> - passed <input type="checkbox"/> - not passed
-------------------------------------	---------	---

Standard used:	EN 61000-3-3 Flicker
Short time (Pst):	1 min
Observation time:	1 min (1 Flicker measurement)
Customer:	SHENZHEN AGLARE LIGHTING CO., LTD.
Mains supply voltage:	DC 12V
Ambient Temperature:	25°C
Humidity:	56%
Barometric Pressure:	100kPa
E. U. T.:	LED STRIPS
	M/N: YJ-LSF5050
Date of test:	19 June 2009
Tester:	Roy

Maximum Flicker results

	EUT values	Limit	Result
Pst	0.07	1.00	PASS
dc [%]	0.00	3.30	PASS
dmax [%]	0.00	4.00	PASS
dt [s]	0.00	0.50	PASS

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Flickermeter 1000-4-15 for 230V/50Hz

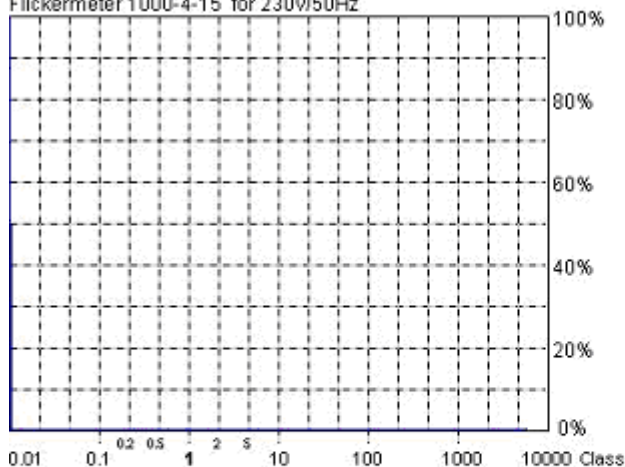

Actual Flicker (Fli):	0.00
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Ptf):	0.07
Limit (Ptf):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.00%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

Urms = 230.7 V P = 7.510 W
 Irms = 0.076 A pf = 0.427

Range: 1 A
 V-nom: 230 V
 TestTime: 1 min (100%)

Test completed, Result: PASSED

NAR-1000 EMC-Partner

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.5 Electrostatic discharge

For test instruments and accessories used see section 6 part 6.6.

5.5.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.5.2 Severity of levels electrostatic discharge

5.5.2.1 Severity level: Contact discharge at ±4KV air discharge at ±8KV

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X	Special	Special


5.5.2.2 Performance criterion: **B**

5.5.3 Description of the test set-up

5.5.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.5.3.2 Block Diagram of Test Setup

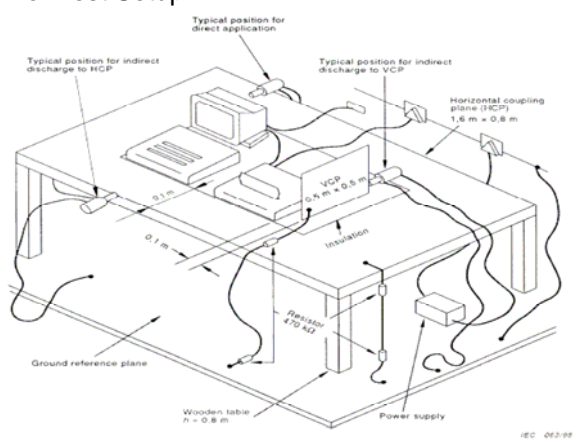

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.5.4 Test specification:

Contact discharge voltage:	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 4 kV	
Air discharge voltage:	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 8 kV
Discharge impedance:	<input type="checkbox"/> 330 Ω / 150 pF		
Discharge factor:	<input type="checkbox"/> ≥ 1 sec.		
Number of discharges:	<input type="checkbox"/> ≥ 10		
Type of discharge:	Direct discharge	<input type="checkbox"/> Air discharge	
		<input type="checkbox"/> Contact discharge	
	Indirect discharge	<input type="checkbox"/> Contact discharge	
Polarity:	<input type="checkbox"/> Positive	<input type="checkbox"/> Negative	
Discharge location:	<input type="checkbox"/> see photo documentation of the test set-up		
	<input type="checkbox"/> all external locations accessible by hand		
	<input type="checkbox"/> horizontal plate (HCP)		
	<input type="checkbox"/> vertical coupling plate (VCP)		

5.5.5 Test result

The requirements are **Fulfilled**

Performance Criterion: **B**

Remarks: During the test no deviation was detected to the selected operation mode(s).

5.6 Radiated, radio-frequency, electromagnetic field

For test instruments and accessories used see section 6 part 6.7.

5.6.1 Description of the test location

Test location :	Semi-Anechoic chamber
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.6.2 Severity levels of radiated, Radio-frequency, electromagnetic field

5.6.2.1 Severity level: 3V/m

Level	Field strenght(V/m)
1.	1
2.	3
3.	10
X	Special


5.6.2.2 Performance criterion: A

5.6.3 Description of the test set-up

5.6.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.6.3.2 Block Diagram of Test Setup

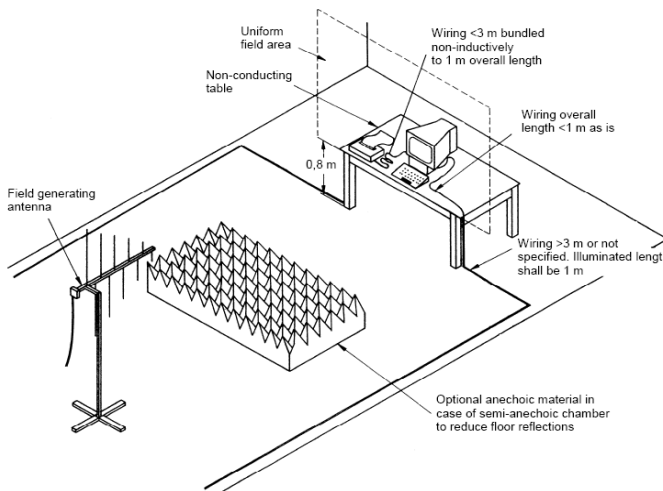

IEC 03406

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.6.4 Test specification:

Frequency range:	■ 80 MHz to 1000 MHz
Field strength:	■ 3 V/m
EUT - antenna separation:	■ 3 m
Modulation:	■ AM: 80 % ■ sinusoidal 1000Hz
Frequency step:	■ 1 % with 3 s dwell time
Antenna polarisation:	■ horizontal ■ vertical

5.6.5 Test result

The requirements are **Fulfilled**

Performance Criterion: **A**

Remarks: During the test no deviation was detected to the selected operation mode(s).

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.7 Electrical fast transients / Burst

For test instruments and accessories used see section 6 part 6.8.

5.7.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.7.2 Severity levels of electrical fast transients / Burst

5.7.2.1 Severity level: ±1000V for AC power supply lines

Open circuit output test voltage and repetition rate of the impulses				
Level	On power port, PE		On I/O signal, data and control ports	
	V peak(KV)	Repetition rate (KHz)	Voltage peak	Repetition rate (KHz)
1.	0.5	5 or 100	0.25	5 or 100
2.	1	5 or 100	0.5	5 or 100
3.	2	5 or 100	1	5 or 100
4.	4	5 or 100	2	5 or 100
X	Special	Special	Special	Special


5.7.2.2 Performance criterion: **B**

5.7.3 Description of the test set-up

5.7.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.7.3.2 Block Diagram of Test Setup

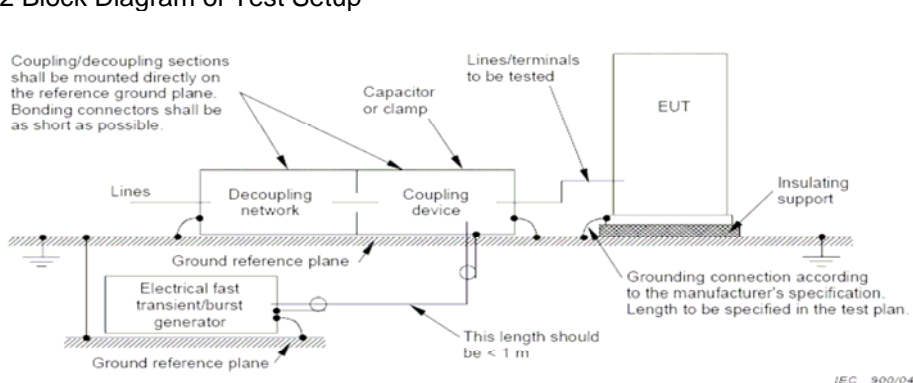

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.8 Surge

For test instruments and accessories used see section 6 part 6.9.

5.8.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.8.2 Severity levels of surge

5.8.2.1 Severity level: Line to line: $\pm 0.5KV$, Line to Earth: $\pm 1KV$

Level	Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special


5.8.2.2 Performance Criterion: **B**

5.8.3 Description of the test set-up

5.8.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.8.3.2 Block Diagram of Test Setup

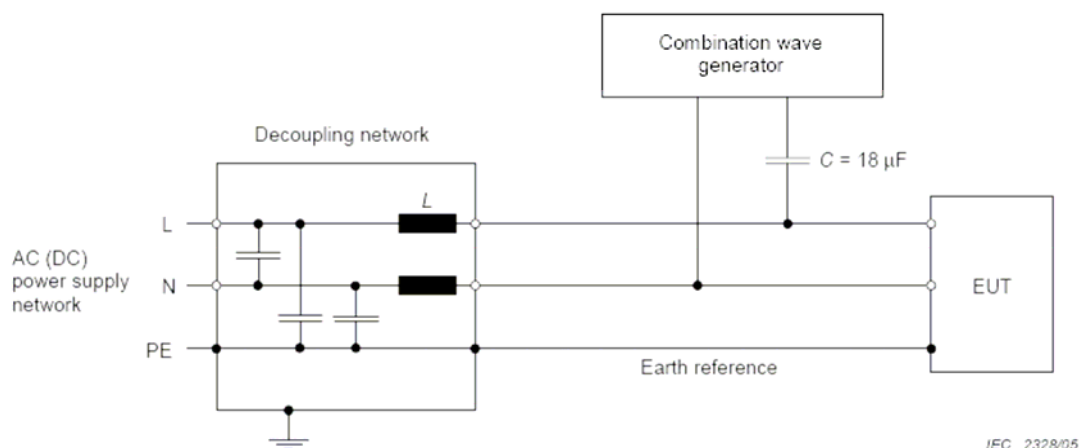

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.8.4 Test specification:

Pulse amplitude-Power line sym.: Source impedance: 2 Ω + 18 μ F	<input checked="" type="checkbox"/> 0.5 kV <input type="checkbox"/> 1 kV <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV
Pulse amplitude-Power line unsym.: Source impedance: 12 Ω + 9 μ F	<input checked="" type="checkbox"/> 0.5 kV <input checked="" type="checkbox"/> 1 kV <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV
Number of surges:	<input checked="" type="checkbox"/> 5 Surges/Phase angle
Phase angle:	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°
Repetition rate:	<input checked="" type="checkbox"/> 60 s
Polarity:	<input checked="" type="checkbox"/> positive <input checked="" type="checkbox"/> negative

5.8.5 Coupling points

Cable description:	AC power Line: L+N, L+PE, N+PE
Screening:	<input type="checkbox"/> screened <input checked="" type="checkbox"/> unscreened
Status:	<input type="checkbox"/> passive <input checked="" type="checkbox"/> active
Signal transmission:	<input checked="" type="checkbox"/> analogue <input type="checkbox"/> digital
Length:	<input checked="" type="checkbox"/> 1.5 m

5.8.6 Test result

The requirements are **Fulfilled**

Performance Criterion : **B**

Remarks: During the test no deviation was detected to the selected operation mode(s).

5.9 Conducted disturbances induced by radio-frequency fields

For test instruments and accessories used see section 6 part 6.10.

5.9.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.9.2 Severity levels of conducted disturbances induced by radio-frequency fields discharge

5.9.2.1 Severity Level: 3V

Level	Field Strength (V)
1.	1
2.	3
3.	10
X	Special


5.9.2.2 Performance Criterion: A

5.9.3 Description of the test set-up

5.9.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.9.3.2 Block Diagram of Test Setup

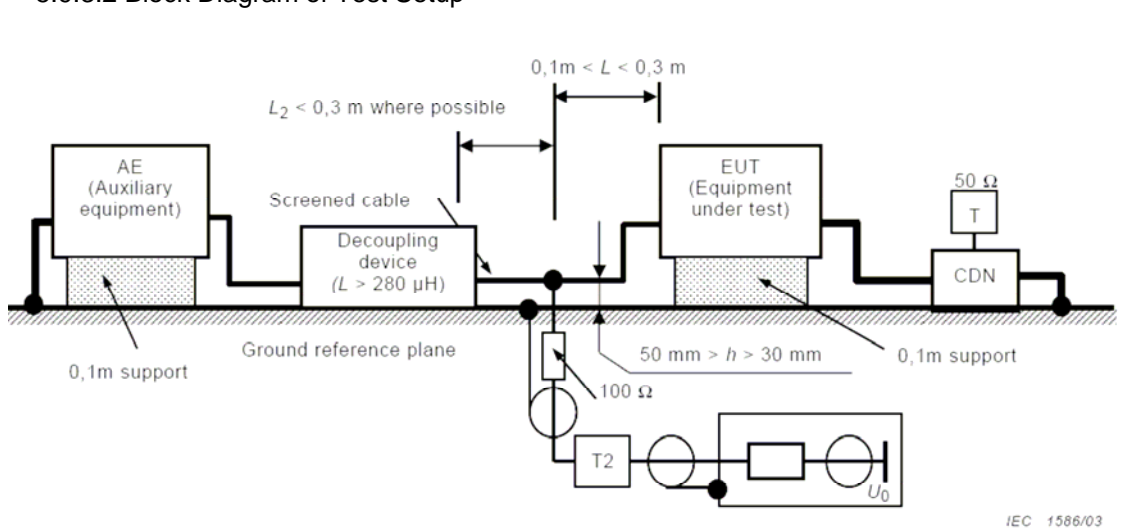

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.9.4 Test specification:

Frequency range:	■ 0.15 MHz to 80 MHz
Test voltage:	■ 3 V
Modulation:	■ AM: 80 % ■ sinusoidal 1000Hz
Frequency step:	■ 1 % with 3 s dwell time

5.9.5 Coupling points

Cable description (Port1):	AC power Line: L+N,L+PE, N+PE
Screening:	<input type="checkbox"/> screened ■ unscreened
Status:	<input type="checkbox"/> passive ■ active
Signal transmission:	■ analogue <input type="checkbox"/> digital
Length:	■ 0.3 m

Cable description (Port2):	/
Screening:	<input type="checkbox"/> screened <input type="checkbox"/> unscreened
Status:	<input type="checkbox"/> passive <input type="checkbox"/> active
Signal transmission:	<input type="checkbox"/> analogue <input type="checkbox"/> digital
Length:	<input type="checkbox"/> 0.3 m

5.9.6 Test result

The requirements are **Fulfilled**

Performance Criterion: **A**

Remarks: During the test no deviation was detected to the selected operation mode(s).

5.10 Power frequency magnetic field

For test instruments and accessories used see section 6 part 6.11.

5.10.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.10.2 Severity levels of magnetic field immunity

5.10.2.1 Severity Level: 3A/m

Level	Magnetic Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X.	Special


5.10.2.2 Performance Criterion: A

5.10.3 Description of the test set-up

5.10.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.10.3.2 Block Diagram of Test Setup

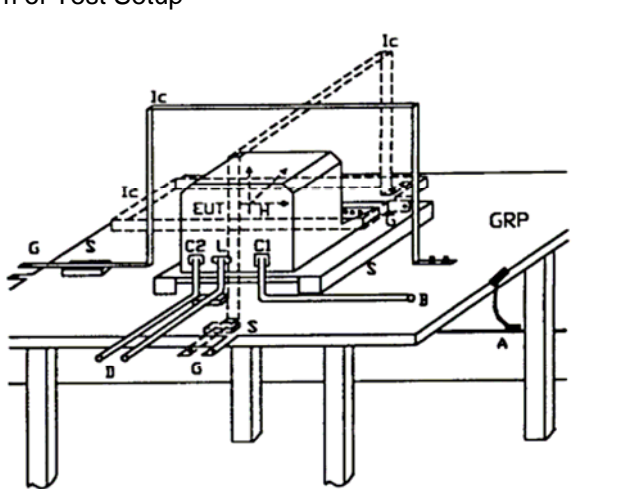

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.10.4 Test specification:

Test frequency:	■ 50 Hz		
Continuous field:	■ 3 A/m		
Duration (Continuous field):	■ 60 s each Axis		
Short duration (1-3s):	■ 300 A/m		
Axis:	■ x-axis	■ y-axis	■ z-axis

5.10.5 Test result

The requirements are **Fulfilled**

Performance Criterion: **A**

Remarks: During the test no deviation was detected to the selected operation mode(s).

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.11 Voltage dips

For test instruments and accessories used see section 6 part 6.12.

5.11.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.11.2 Severity levels of voltage dips


Test Level (%Ut)	Voltage Dips (%Ut)	Performance Criterion	Duration (in period)
70	30	C	10

5.11.3 Description of the test set-up

5.11.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.11.3.2 Block Diagram of Test Setup

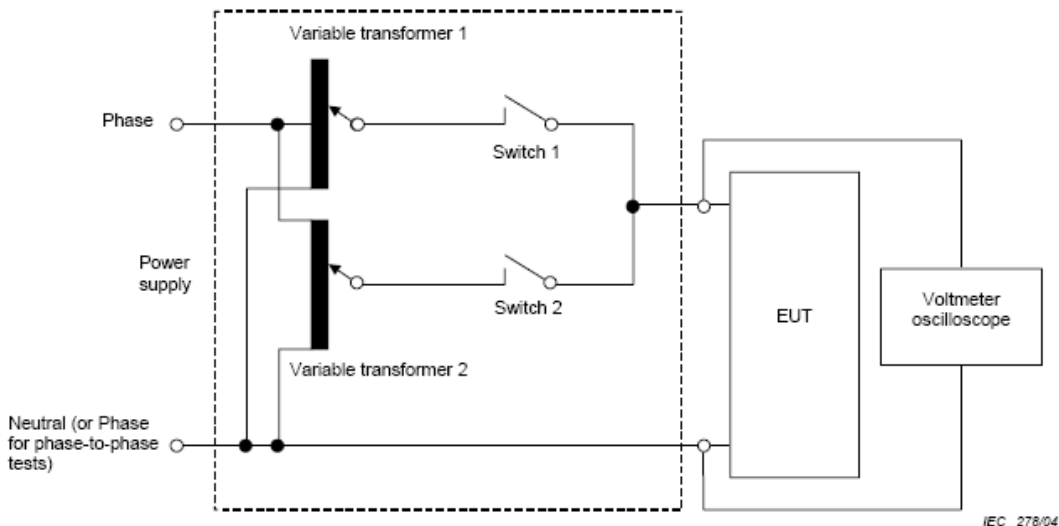

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



5.11.4 Test specification:

Nominal Mains Voltage (V_N):	■ AC 230 V
Number of voltage fluctuations:	■ 3
Level of reduction(dip) / duration:	■ 30 % / 200ms

5.11.5 Test result

The requirements are **Fulfilled**

Performance Criterion: **C**

Remarks: During the test no deviation was detected to the selected operation mode(s).

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

5.12 Voltage short interruptions

For test instruments and accessories used see section 6 part 6.13.

5.12.1 Description of the test location

Test location :	Test location no. 2
Power supply:	DC 12V
Test condition:	Ambient Temperature: 25°C, Humidity:56%
Date of test :	19 June 2009
Operator :	Roy

5.12.2 Severity levels of voltage short interruptions


Test Level (%Ut)	Voltage Short Interruptions (%Ut)	Performance Criterion	Duration (in period)
0	100	B	0.5

5.12.3 Description of the test set-up

5.12.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.12.3.2 Block Diagram of Test Setup

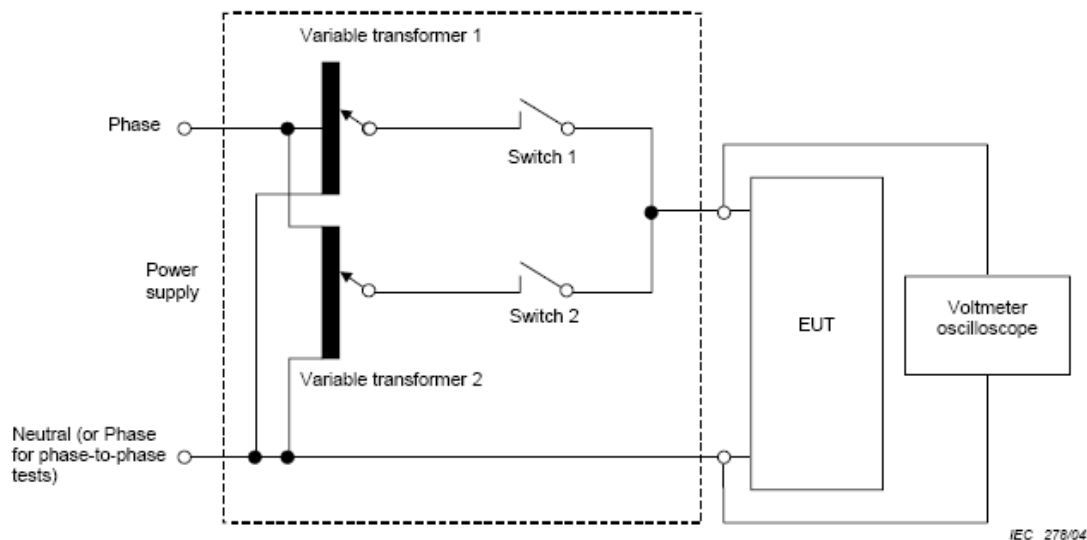

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**5.12.4 Test specification:**

Nominal Mains Voltage (V_N):	■ AC 230 V
Number of Interruptions:	■ 3
Duration of the Interruption:	■ 10 ms

5.12.5 Test resultThe requirements are **Fulfilled**Performance Criterion: **B****Remarks:** During the test no deviation was detected to the selected operation mode(s).**Centre of Testing Service**

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

6 USED TEST EQUIPMENT

6.1

Radiated Disturbance (Magnetic field)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2008/12
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2008/12
3	Triple-loop antenna	ROHDE & SCHWARZ	HM020	100015	2008/12
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2008/12
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2008/12

6.2

Power Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESVS10	842885/001	2008/12
2	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	03466	2008/12
3	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2008/12

6.3

Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2008/12
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2008/12
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2008/12
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2008/12

6.4

Harmonic Current					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Harmonic And Flicker Analyzer	EMC Partner	HAR1H01B	HAR1000-48	2008/12

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

6.5

Voltage fluctuation and Flicker					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Harmonic And Flicker Analyzer	EMC Partner	HAR1H01B	HAR1000-48	2008/12

6.6

Electrostatic Discharge					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	Schlöder	SESD 200	0302016	2008/12

6.7

RF Field Strength Susceptibility					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	ROHDE & SCHWARZ	SMY 01	843215/014	2008/12
2	AMPLIFIER	KALMUS	713FC	7385-1	2008/12
3	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2008/12

6.8

Electrical Fast Transient/Burst					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMC test system Transient-1000	EMC Partner	TRA1H01B	HAR1000-78	2008/12
2	Coupling Clamp	EMC Partner	SFT 410	0302015	2008/12

6.9

Surge					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMC test system Transient-1000	EMC Partner	TRA1H01B	HAR1000-78	2008/12

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

6.10

Conducted Susceptibility					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	RF generator / amplifier	Schlöder	CDG 6000	HU906007	2008/12
2	CDN	Schlöder	CDN M3	A3003008	2008/12
3	CDN	Schlöde	CDN T2	A3010005	2008/12
4	EM injection clamp	Liithi	EM101	35670	2008/12
5	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2008/12

6.11

Power Frequency Magnetic Field Susceptibility					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EM TEST	EMS61000-8K	409001	2008/12

6.12

Voltage Dips					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMC test system Transient-1000	EMC Partner	TRA1H01B	HAR1000-78	2008/12

6.13

Voltage Short Interruptions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMC test system Transient-1000	EMC Partner	TRA1H01B	HAR1000-78	2008/12

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

7 TEST PHOTOGRAPHS

7.1. Photos of power line conducted emission measurement



Front view of conducted measurement



Side view of Conducted measurement

7.2. Photos of radiated electromagnetic emission measurement



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


7.3. Photo of harmonic current emission measurement



7.4. Photo of voltage fluctuations and flicker emission measurement



7.5. Photo of electrostatic discharge Immunity measurement

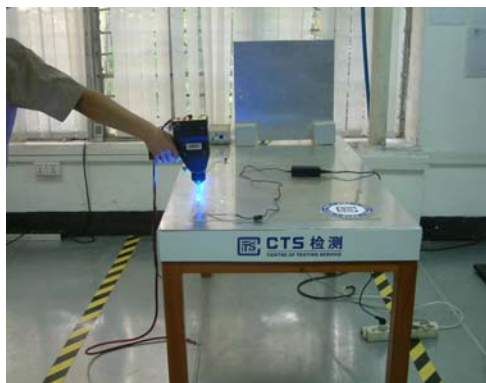

Air discharge

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service




Contact discharge

7.6. Photo of RF field strength Immunity measurement

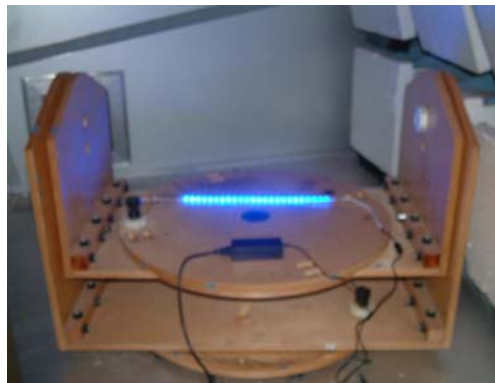

7.7. Photo of electrical fast transient/burst Immunity measurement

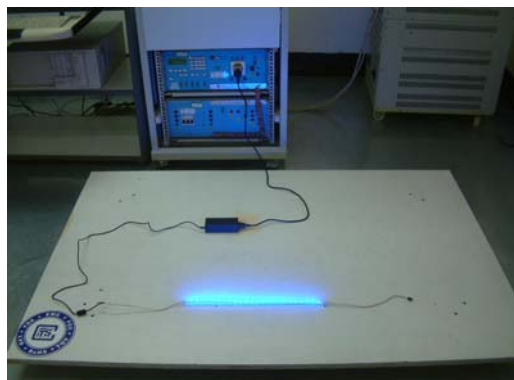

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


7.8. Photo of surge immunity measurement

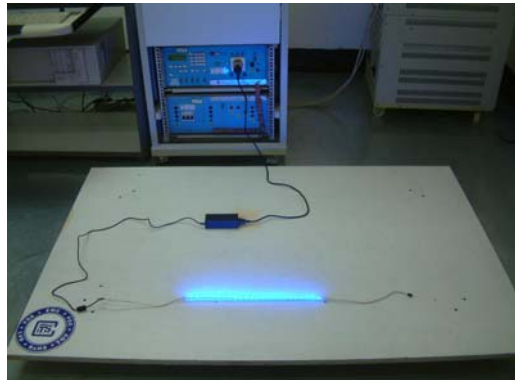

7.9. Photo of conducted disturbance Immunity measurement

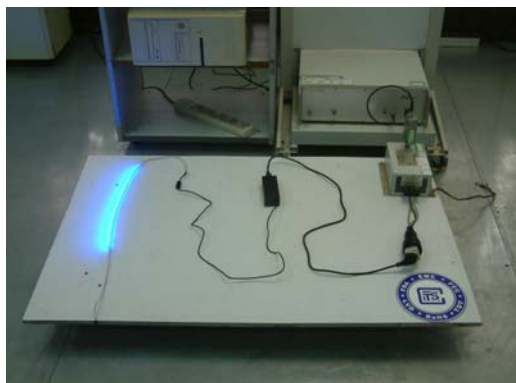

7.10 Photo of power frequency magnetic field immunity measurement

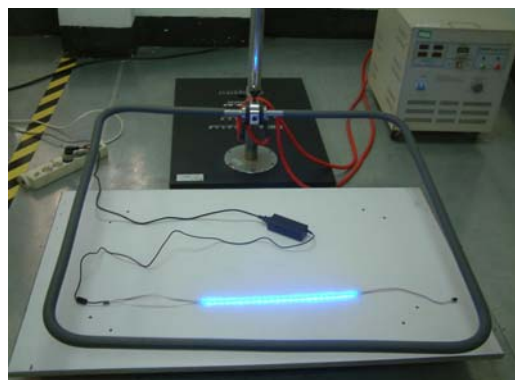

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

7.11. Photo of voltage dips immunity measurement

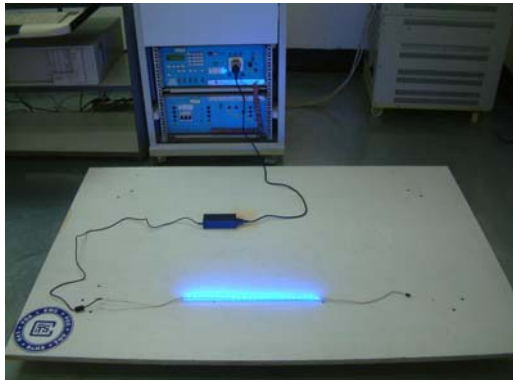

7.12. Photo of voltage short interruptions immunity measurement

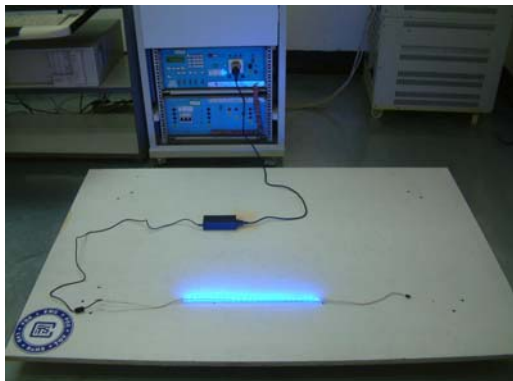

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

8 EXTERNAL AND INTERNAL PHOTOS OF THE EUT



External view-front



External view-rear



External view-inner

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



9 Manufacturer/ Approval holder Declaration

The following identical model(s):

**YJ-LS1210,YJ-LSF1210,YJ-LS5050,YJ-LSC5050,
YJ-LSCF5050,YJ-LS534, YJ-LSFA3/A4**

Belong to the tested device:

Product description: **LED STRIPS**
Model name: **YJ-LSF5050**

No additional models were tested.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Centre of Testing Service

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service